

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

# HORIZONTAL BOTTLE COOLERS

DW94HC Deep Well Series Hydrocarbon Series

MODEL: DW94HC-S

5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty



### **CABINET CONSTRUCTION**

- Stainless steel exterior
- · Galvanized steel interior and floor
- Full electronic control
- Tops include easy glide, stainless steel lids (4)
- Stainless steel countertop with integral glass stops
- Six (6) epoxy coated adjustable wire dividers
- · Bottle opener and cap catcher standard
- Constructed with high cooling RPM fans to provide fast cooling

### **OPTIONS & ACCESSORIES**

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel interior
- Wire divider
- Lid locks
- 3" Casters or 6" adjustable leg with plate
- Remote option\* (see note on back on page)

### **REFRIGERATION SYSTEM**

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Forced air refrigeration system holds product between 36°- 40°F












MODEL	DW94HC-S	
EXTERNAL DIMENSIONAL DATA		
Width Overall	95"	
Depth Overall	26 %"	
Depth Overall with Cap Catcher	27 %"	
Height Overall	33 ¾"	
Number of Lids	4	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	28.63	
Internal Width Overall (in)	90"	
Internal Depth Overall (in)	22 ¾"	
Internal Height Overall at Step (in)	16 ¾"	
Internal Height Overall (in)	26 ¾"	
Number of Dividers	6	
12 oz. Bottle Capacity	39 Cases	
12 oz. Can Capacity	55 ¾ Cases	
ELECTRICAL DATA		
Full Load Amperes	2.5	
REFRIGERATION DATA		
Horsepower	1/4	
Capacity (BTU/Hr)	1702	
Heat Rejection (BTU/Hr)	2553	
Charge (lbs/grams/ounces)	0.2094 / 95 / 3.35	
SHIPPING DATA		
Gross Weight - Crated	468 lbs	
Height - Crated	41"	
Width - Crated	98"	
Depth - Crated	29"	

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

## **Horizontal Bottle Coolers - Deep Well** Model: DW94HC-S

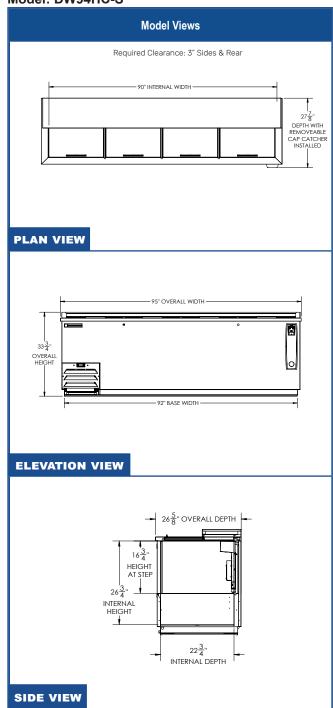



#### **ELECTRICAL CONNECTION**



Unit pre-wired at factory and include 8' long cord