



# BEVERAGE-AIR

Project: \_\_\_\_\_  
Item: \_\_\_\_\_  
Location: \_\_\_\_\_  
Approved: \_\_\_\_\_

AIA#

SIS#

## HORIZON TOP MOUNT REACH-IN

### HRS3HC Half-Solid Triple Door Reach-In Refrigerator

#### Hydrocarbon Series

MODEL:

HRS3HC-1HS

HRS3HC TOP MOUNT REACH-IN REFRIGERATOR



**5 Year Parts/Labor Warranty Available**

**7 Year Compressor Warranty**

#### CABINET CONSTRUCTION

- Exterior is stainless steel front and continuous coil coated sides
- Stainless steel interior
- Full electronic control
- One piece grille
- LED interior light
- Self-closing door with 120° stay-open feature, on cam-lift hinges
- Field reversible doors
- Door locks
- Snap-in magnetic gaskets for positive door seal
- Nine (9) heavy-duty epoxy coated wire shelves
- 6" Heavy-duty casters, two (2) with brakes
- 8' Cord and plug (see electrical data for details)

#### OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Tray slide pair, 1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (A)
- Stainless steel universal tray slide pair, 1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (AC)
- Tray slide kit #4 (19 sets per half section)
- Additional shelves
- Shelf clips
- Stainless steel breaker
- 6" Legs seismic/flanged
- 3" Casters
- Remote option\* (see note on back page)

#### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Hot gas condensate evaporator
- Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F



Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)



3779 Champion Blvd., Winston-Salem, NC 27105  
1-888-845-9800 Fax: 1-336-245-6453  
Beverage-Air.com Sales@bevair.com



# BEVERAGE-AIR

| MODEL                            | HRS3HC-1HS        |
|----------------------------------|-------------------|
| <b>EXTERNAL DIMENSIONAL DATA</b> |                   |
| Width Overall                    | 78"               |
| Depth Overall with Handles       | 33 5/8"           |
| Height Overall                   | 85"               |
| Number of Doors                  | 6                 |
| Depth with Door Open 90°         | 55 1/8"           |
| Door Openings (in)               | 21 5/8" x 29 5/8" |
| <b>INTERNAL DIMENSIONAL DATA</b> |                   |
| NET Capacity (cubic ft.)         | 71.52             |
| Internal Width Overall (in)      | 74"               |
| Internal Depth Overall (in)      | 25 7/8"           |
| Internal Height Overall (in)     | 62"               |
| Number of Shelves                | 9                 |
| <b>ELECTRICAL DATA</b>           |                   |
| Full Load Amperes 115/60/1**     | 6.0               |
| <b>REFRIGERATION DATA</b>        |                   |
| Horsepower                       | 1/3               |
| Capacity (BTU/Hr)                | 2800              |
| Heat Rejection (BTU/Hr)          | 4200              |
| Charge (lbs/grams)               | 0.3307/150        |
| <b>SHIPPING DATA</b>             |                   |
| Gross Weight (crated lbs)        | 791 lbs           |
| Height - Crated                  | 88"               |
| Width - Crated                   | 80"               |
| Depth - Crated                   | 36"               |

\*NOTE: Remote units are field wired and come with 6" legs.  
Refrigerant must be specified at time of order.

## ELECTRICAL CONNECTION



**115/60/1  
NEMA 5-15P**


Unit pre-wired at  
factory and include  
8' long cord and  
plug set.

\*\* NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Beverage-Air recommends using a HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.


## Top Mount Reach-In Refrigerator Model: HRS3HC-1HS

### Model Views


Required Clearance: Top 12", Rear 3", Sides 0"



### PLAN VIEW

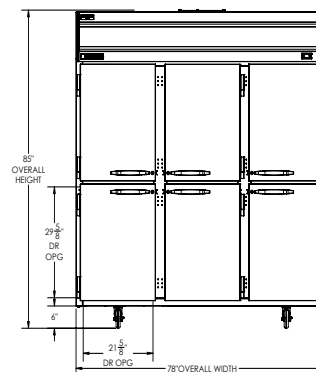

### ELEVATION VIEW

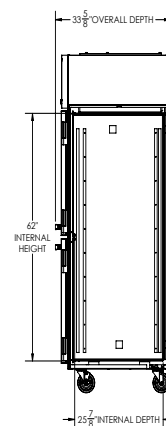

### SIDE VIEW

