

| Project: | AIA# |
|-----------|------|
| Item: | |
| Location: | SIS# |
| Approved: | |

SCHOOL MILK COLD WALL COOLER

ST34HC Dual Access Cooler **Hydrocarbon Series**

MODEL: ST34HC-S



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Stainless steel lids, hinged doors and door latches
- Dual sided access
- Full electronic control
- · Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning and connecting to drain hose with hose adapter
- Flexible compression door gaskets, ensures a tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder locks
- 4" Heavy-duty plate casters (2 with locks)
- Cold wall milk coolers are designed to hold product temperature during service. Product should be removed at the end of service and moved to long-term, refrigerated storage

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Corner bumpers
- · Cafeteria tray slides
- Graphics

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Maintains product temperature between 36°F-40°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



| MODEL | ST34HC-S | |
|------------------------------|-------------------|--|
| EXTERNAL DIMENSIONAL DATA | | |
| Width Overall | 34" | |
| Depth Overall | 31 1/4" | |
| Height Overall with Casters | 41 1/8" | |
| Number of Lids/Doors | Dual Access | |
| Both Lids Extended | 61" | |
| INTERNAL DIMENSIONAL DATA | | |
| NET Capacity (cubic ft.) | 12.37 | |
| Internal Width Overall (in) | 31" | |
| Internal Depth Overall (in) | 27" | |
| Internal Height Overall (in) | 25 ½" | |
| CASE CAPACITY | | |
| 13" X 13" X 11" | 8 | |
| 19" X 13" X 11" | 4 | |
| ELECTRICAL DATA | | |
| Full Load Amperes | 3.7 | |
| REFRIGERATION DATA | | |
| Horsepower | 1/2 | |
| Capacity (BTU/Hr) | 1690 | |
| Heat Rejection (BTU/Hr) | 2535 | |
| Charge (lbs/grams/ounces) | 0.1544 / 70 / 2.5 | |
| SHIPPING DATA | | |
| Gross Weight - Crated | 290 lbs | |
| Height - Crated | 44" | |
| Width - Crated | 37" | |
| Depth - Crated | 33" | |

School Milk Cooler - Dual Access

Model: ST34HC-S

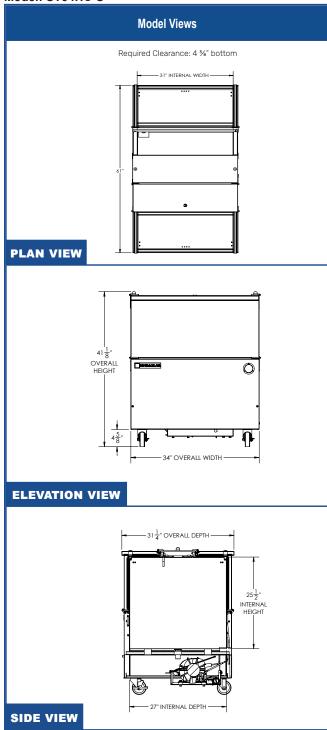



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8' NEMA 5-15P and plug set.