

| Project: | AIA# |
|-----------|------|
| ltem: | |
| Location: | SIS# |
| Approved: | |

WORKTOP REFRIGERATOR

WTR24AHC Solid Door With Foamed-In Place Backsplash Hydrocarbon Series

MODEL: WTR24AHC-FIP



*Note: Shown with optional full electronic control

5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, door and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel top for added durability
- Foamed-in place backsplash
- Mechanical control
- Interior thermometer is standard
- Self-closing door with 120° stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Two (2) epoxy-coated steel wire shelves
- Field-reversible door (hinge kit not included)

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel back
- · Stainless steel interior
- 16 Gauge stainless steel top
- Full electronic control*
- Additional shelves
- Shelf clips
- · Glass door option
- Right or left hinged door
- Locks (solid doors only)
- · Wire shelf divider
- · Cutting board
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option** (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



| MODEL | WTR24AHC-FIP | |
|------------------------------------|--------------------|--|
| EXTERNAL DIMENSIONAL DATA | | |
| Width Overall | 24" | |
| Depth Overall with Handle & Bumper | 32" | |
| Height Overall with 6" Casters | 39 %" | |
| Number of Doors | 1 | |
| Depth with Door Open 90° | 52 1⁄4" | |
| Door Opening | 19 %" x 21 %" | |
| INTERNAL DIMENSIONAL DATA | | |
| NET Capacity (cubic ft.) | 5.16 | |
| Internal Width Overall | 20" | |
| Internal Depth Overall | 20 ¼" | |
| Internal Height Overall | 23" | |
| Number of Shelves | 2 | |
| ELECTRICAL DATA | | |
| Full Load Amperes | 2.0 | |
| REFRIGERATION DATA | | |
| Horsepower | 1/6 | |
| Capacity (BTU/Hr) | 1110 | |
| Heat Rejection (BTU/Hr) | 1665 | |
| Charge (lbs/grams/ounces) | 0.1323 / 60 / 2.12 | |
| SHIPPING DATA | | |
| Gross Weight - Crated | 182 lbs | |
| Height - Crated | 43" | |
| Width - Crated | 30" | |
| Depth - Crated | 33" | |

^{**}NOTE: Remote units are field wired and come with 6" legs.

Worktop Refrigerator Model: WTR24AHC-FIP

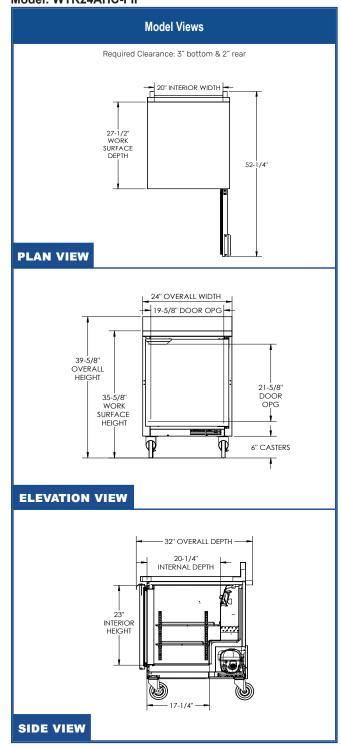



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord