



BEVERAGE-AIR®

Project: _____
Item: _____
Location: _____
Approved: _____

AIA#

SIS#

SHALLOW DEPTH UNDERCOUNTER FREEZER

UCF24HC Solid Door Freezer
Hydrocarbon Series

MODEL:
UCF24HC

UCF24HC UNDERCOUNTER FREEZER



5 Year Parts/Labor Warranty Available

7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, top, door and grille (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing door with 120° stay-open feature, on lift-off hinges
- Door opening includes low wattage, anti-condensate heater
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Two (2) epoxy-coated steel wire shelves
- Field-reversible door

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel back
- Stainless steel interior
- Right or left hinged door
- Additional shelves
- Shelf clips
- Glass door option
- Lock
- Wire shelf divider
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Freezers capable of maintaining product temperature of -10°F



Please verify qualifying units by visiting:
www.energystar.gov/cfs



3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com



BEVERAGE-AIR


| MODEL | UCF24HC |
|------------------------------------|---|
| EXTERNAL DIMENSIONAL DATA | |
| Width Overall | 24" |
| Depth Overall with Handle & Bumper | 29 $\frac{7}{8}$ " |
| Height Overall with 6" Casters | 34 $\frac{5}{8}$ " |
| Number of Doors | 1 |
| Depth with Door Open 90° | 50 $\frac{1}{8}$ " |
| Door Opening | 19 $\frac{5}{8}$ " x 21 $\frac{5}{8}$ " |
| INTERNAL DIMENSIONAL DATA | |
| NET Capacity (cubic ft.) | 4.53 |
| Internal Width Overall (in) | 20" |
| Internal Depth Overall (in) | 13 $\frac{1}{8}$ " |
| Internal Height Overall (in) | 23" |
| Number of Shelves | 2 |
| ELECTRICAL DATA | |
| Full Load Amperes | 2.5 |
| REFRIGERATION DATA | |
| Horsepower | 1/4 |
| Capacity (BTU/Hr) | 857 |
| Heat Rejection (BTU/Hr) | 1285.5 |
| Charge (lbs/grams/ounces) | 0.0992 / 45 / 1.59 |
| SHIPPING DATA | |
| Gross Weight - Crated | 182 lbs |
| Height - Crated | 38" |
| Width - Crated | 29" |
| Depth - Crated | 32" |

*NOTE: Remote units are field wired and come with 6" legs.
Refrigerant must be specified at time of order.


Undercounter Freezer - Shallow Depth Model: UCF24HC

Model Views


Required Clearance: 3" Bottom & 2" Rear

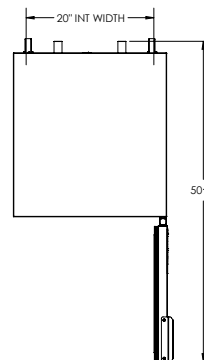

PLAN VIEW



ELEVATION VIEW



SIDE VIEW

ELECTRICAL CONNECTION



115/60/1
NEMA 5-15P

Unit pre-wired at
factory and include 8'
long cord and plug set.



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

an Ali Group Company



The Spirit of Excellence